# Eccentric Quick Clamps • with screw 23390.0322



# **Product Description**

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

#### Material

# Support washer

Thermoplastic POM, glass-fiber reinforced

· Zinc die-cast, plastic coated, black, similar to RAL 9005

### Inner parts

• Stainless steel 1.4305


#### Screw


• Stainless steel 1.4305

#### Adjusting nut

• Stainless steel 1.4305

#### **Drawing**





#### **Order information**

Dimensions								Stroke s		I	Art. No.
1	d <sub>2</sub>	h <sub>1</sub> max. in clamping position	d <sub>3</sub>	d <sub>4</sub>	<b>h₂</b> max.	Regulating- range h <sub>3</sub> min.	b	at 90° lever position	max.		
[mm]								[mm]	[°C]	[g]	
with screw, adjustable – picture 2, Stainless steel											
82	М8	35	20	25	19.5	2.5	20	1	80	140	23390.0322




Erwin Halder KG

www.halder.com Page 1 of 2

Published on: 10.8.2024

# **Application example**

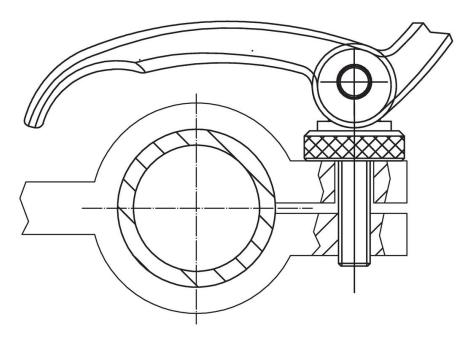

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

#### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 27.06.2024.

#### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Page 2 of 2 Published on: 10.8.2024