Spring Plungers • with moveable ball and internal hexagon 22031.0052



Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection. The running of the ball minimises wear on the counterpart, this also results in a positive locking behaviour depending on the counterpart.

Another advantage of the plastic ball is the electric insulation.

Material

Body

· Free cutting steel, blackened

Bearing

plastic

Ball

· Ball-bearing steel, hardened

Spring

Stainless steel

Characteristic

Heavy spring load: marked with two lines





Standard spring load

Heavy spring load

More information

Notes

Special types on request. Spring plungers are specially tested for spring range and forces.


References

Thread lock on request, please refer to appendix - Technical Data -Calculation of indexing resistance, please refer to appendix - Technical Data -

Further products

- · Locators, with bore hole, for spring plungers
- · Locators, smooth, for spring plungers
- · Holders, for spring plungers

Drawing



Order information

Dimensions			ws	Stroke	Spring load ¹⁾				I	Art. No.
d ₁	d ₂	ı		S	F ₁ ~	F ₂ ~	min.	max.		
[mm]			[mm]	[mm]	[N]		[°C]		[g]	
free cutting steel, heavy spring load										
M12	6.5	26	6	2.5	36.5	77.3	-30	90	12	22031.0052


¹⁾ statistical average value

Erwin Halder KG

www.halder.com Page 1 of 2

Published on: 10.8.2024

Application example

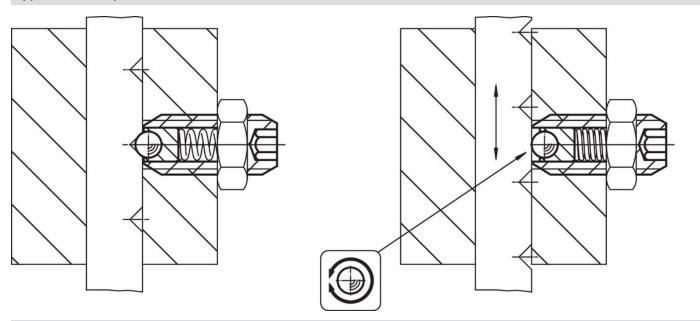

Compliance

RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Page 2 of 2 Published on: 10.8.2024