# Self-Aligning Pads ⋅ self-resetting 22731.0130



# **Product Description**

Self-aligning pads are used as stop, support and thrust pad and are suitable for installation in clamping elements.

By resetting to the parallel position the contact point of the self-aligning pad provides a defined initial position, thus preventing the pad clamping in an oblique position when inserting the workpiece.

#### Material

## Spring element

· Thermoplastic PUR

• Stainless steel 1.3541, nickel-plated


· Stainless steel 1.4057, heat-treated

## More information


#### **Notes**

Ball protected against rotating. Loading capacity valid for steel and stainless steel designs.


# **Drawing**




picture 1



picture 2



picture 3



picture 4

Erwin Halder KG


# **Order information**

Dimensions							Load capacity	Tightening	I	Art. No.
d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	I <sub>1</sub>	l <sub>2</sub>	Ball diameter		for static load max.	torque max.	_	
				-0.5			IIIax.	IIIax.		
[mm]						[mm]	[kN]	[Nm]	[9]	
with male thread, flat-faced ball, bearing surface plain – picture 1, Stainless steel										
with male t	inread, flat-face	ed ball, bear	ing surrace	piairi – picti	ure 1, Stainless steel					

www.halder.com Page 1 of 3

Published on: 10.8.2024

# **Application example**

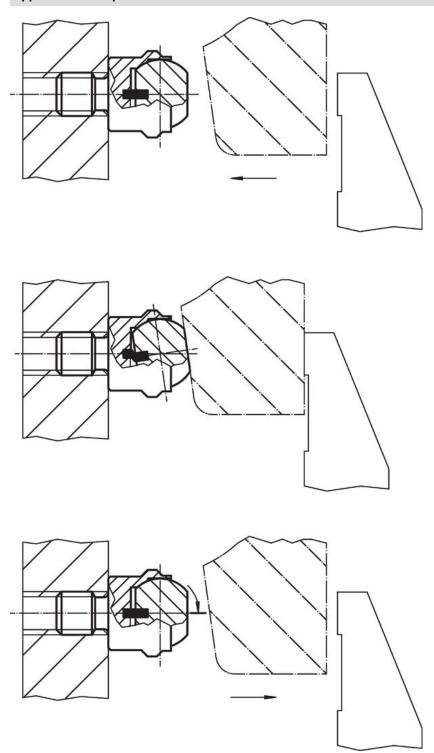



www.halder.com Page 2 of 3
Published on: 10.8.2024

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

# Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 27.06.2024.

## Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Published on: 10.8.2024

www.halder.com Page 3 of 3