# Eccentric Quick Clamps • with screw 23390.0014



## **Product Description**

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

#### Material

### Support washer

· Thermoplastic PA, glass-fiber reinforced

· Zinc die-cast, plastic coated, black, similar to RAL 9005

## Inner parts

• Steel, zinc-plated by galvanization


### Screw


• Steel, zinc-plated by galvanization

#### Adjusting nut

Steel, zinc-plated by galvanization

### **Drawing**





### **Order information**


Dimensions							Stroke s	<u>I</u>	Ĭ	Art. No.
I	d <sub>2</sub>	h <sub>1</sub> max. in clamping position	d <sub>3</sub>	$d_5$	h <sub>2</sub> max.	b	at 90° lever position	max.		
[mm]							[mm]	[°C]	[g]	
with screw - picture 1, Steel										
63	M6	40	16	18.5	16.4	16	0.75	80	68	23390.0014



Erwin Halder KG

www.halder.com Page 1 of 2 Published on: 10.8.2024

# **Application example**

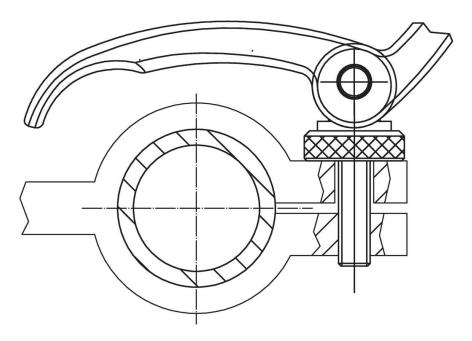

# Compliance

# RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

### Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Page 2 of 2 Published on: 10.8.2024