

Mounting Pads

EH 22590.



Product Description

Mounting pads can be used as foot or thrust pad. Not parallel bearing surfaces up to 15° degrees can be compensated.

Material

Ball element

- Heat-treated steel, tempered, blackened
- Stainless steel 1.4305

Ball element with bolt

- Heat-treated steel, tempered, blackened
- Stainless steel 1.4305

Lock nut

- Steel, blackened, ISO 4032
- Steel, blackened, DIN 934
- Stainless Steel A2, ISO 4032
- Stainless Steel A2, DIN 934

Pad


- Heat-treated steel, blackened
- Stainless steel 1.4305
- Thermoplastic POM, white

More information

Notes



For the versions $d_1 = M10$ and $M12$ the lock nut conforms to DIN 934.

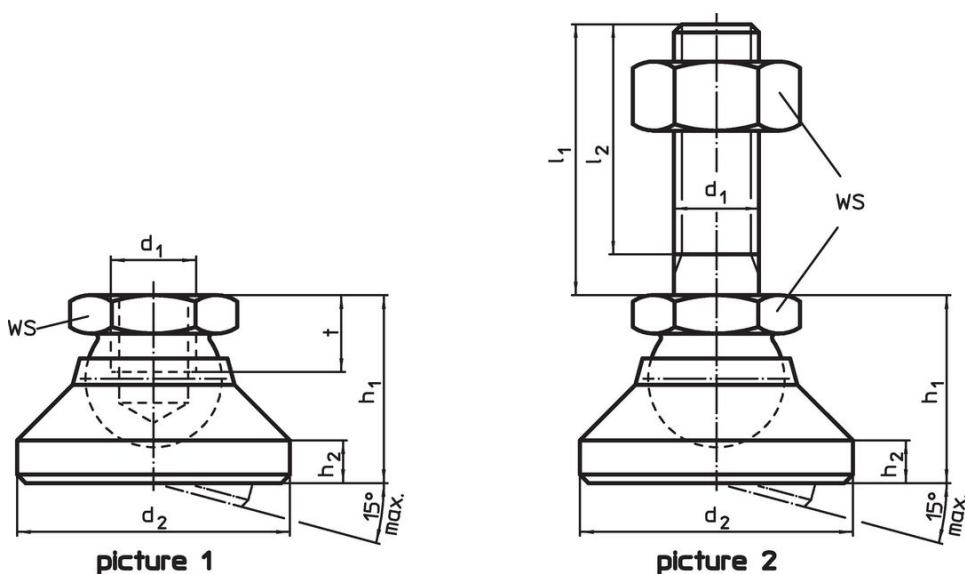Drawing




Order information

d ₁	l ₁	d ₂	Dimensions				t	WS	Load capacity for static load max.	Temperature		Weight [g]	Art. No.
			l ₂	h ₁	h ₂	min.				max.			
			[mm]				[mm]	[kN]	[°C]				
pad and ball element – picture 1, Heat-treated steel													
M 6	–	20	–	14	2.5	5.0	10	10	–	250	15.0	22590.0006	
M 8	–	25	–	18	4.0	7.0	13	18	–	250	33.0	22590.0008	
M10	–	32	–	22	5.0	9.0	17	20	–	250	67.0	22590.0010	
M12	–	40	–	26	6.0	11.0	19	35	–	250	112.0	22590.0012	
M16	–	50	–	32	7.0	13.5	24	45	–	250	254.0	22590.0016	
M20	–	60	–	42	8.0	17.0	30	55	–	250	451.0	22590.0020	
M24	–	60	–	45	9.5	19.0	36	65	–	250	498.0	22590.0024	

d ₁	Dimensions						WS	Load capacity for static load max.	 min. max.		 [g]	Art. No.
	l ₁	d ₂	l ₂	h ₁ ~	h ₂	t			[mm]	[kN]		
pad and ball element – picture 1, Stainless steel												
M 6	–	20	–	14	2.5	5.0	10	8	–	250	15.0	22590.0206
M 8	–	25	–	18	4.0	7.0	13	14	–	250	33.0	22590.0208
M10	–	32	–	22	5.0	9.0	17	16	–	250	67.0	22590.0210
M12	–	40	–	26	6.0	11.0	19	28	–	250	113.0	22590.0212
M16	–	50	–	32	7.0	13.5	24	36	–	250	256.0	22590.0216
M20	–	60	–	42	8.0	17.0	30	44	–	250	452.0	22590.0220
M24	–	60	–	45	9.5	19.0	36	52	–	250	504.0	22590.0224
pad from thermoplastic, ball element from stainless steel – picture 1, Thermoplastic												
M 6	–	20	–	14	2.5	5.0	10	4	-30	80	6.1	22590.0106
M 8	–	25	–	18	4.0	7.0	13	7	-30	80	13.0	22590.0108
M10	–	32	–	22	5.0	9.0	17	10	-30	80	26.0	22590.0110
M12	–	40	–	26	6.0	11.0	19	18	-30	80	40.0	22590.0112
M16	–	50	–	32	7.0	13.5	24	20	-30	80	75.0	22590.0116
M20	–	60	–	42	8.0	17.0	30	22	-30	80	150.0	22590.0120
M24	–	60	–	45	9.5	19.0	36	25	-30	80	184.0	22590.0124
pad and ball element with bolt from steel – picture 2, Heat-treated steel												
M 6	60	20	57.0	14	2.5	–	10	10	–	250	29.0	22590.0410
M 8	80	25	76.0	18	4.0	–	13	18	–	250	66.0	22590.0422
M10	100	32	95.5	22	5.0	–	17	20	–	250	133.0	22590.0438
M10	150	32	145.5	22	5.0	–	17	20	–	250	156.0	22590.0442
M12	100	40	94.5	26	6.0	–	19	35	–	250	237.0	22590.0452
M12	150	40	144.5	26	6.0	–	19	35	–	250	283.0	22590.0456
M16	100	50	94.0	32	7.0	–	24	45	–	250	460.0	22590.0468
M16	200	50	194.0	32	7.0	–	24	45	–	250	608.0	22590.0472
M20	100	60	92.5	42	8.0	–	30	55	–	250	781.0	22590.0482
M20	200	60	192.5	42	8.0	–	30	55	–	250	1015.0	22590.0488
M24	100	60	91.0	45	9.5	–	36	65	–	250	994.0	22590.0495
M24	200	60	191.0	45	9.5	–	36	65	–	250	1320.0	22590.0498
pad and ball element with bolt from steel – picture 2, Stainless steel												
M 6	60	20	57.0	14	2.5	–	10	8	–	250	29.0	22590.0610
M 8	80	25	76.0	18	4.0	–	13	14	–	250	66.0	22590.0622
M10	100	32	95.5	22	5.0	–	17	16	–	250	134.0	22590.0638
M10	150	32	145.5	22	5.0	–	17	16	–	250	158.0	22590.0642
M12	100	40	94.5	26	6.0	–	19	28	–	250	212.0	22590.0652
M12	150	40	144.5	26	6.0	–	19	28	–	250	248.0	22590.0656
M16	100	50	94.0	32	7.0	–	24	36	–	250	412.0	22590.0668
M16	200	50	194.0	32	7.0	–	24	36	–	250	624.0	22590.0672
M20	100	60	92.5	42	8.0	–	30	44	–	250	790.0	22590.0682
M20	200	60	192.5	42	8.0	–	30	44	–	250	1031.0	22590.0688
M24	100	60	91.0	45	9.5	–	36	52	–	250	1001.0	22590.0695
M24	200	60	191.0	45	9.5	–	36	52	–	250	1323.0	22590.0698
pad from thermoplastic, ball element with bolt from stainless steel – picture 2, Thermoplastic												
M 6	60	20	57.0	14	2.5	–	10	4	-30	80	20.0	22590.0510
M 8	80	25	76.0	18	4.0	–	13	7	-30	80	46.0	22590.0522
M10	100	32	95.5	22	5.0	–	17	10	-30	80	93.0	22590.0538
M10	150	32	145.5	22	5.0	–	17	10	-30	80	117.0	22590.0542
M12	100	40	94.5	26	6.0	–	19	18	-30	80	139.0	22590.0552
M12	150	40	144.5	26	6.0	–	19	18	-30	80	175.0	22590.0556
M16	100	50	94.0	32	7.0	–	24	20	-30	80	300.0	22590.0568
M16	200	50	194.0	32	7.0	–	24	20	-30	80	399.0	22590.0572
M20	100	60	92.5	42	8.0	–	30	22	-30	80	523.0	22590.0582
M20	200	60	192.5	42	8.0	–	30	22	-30	80	759.0	22590.0588
M24	100	60	91.0	45	9.5	–	36	25	-30	80	735.0	22590.0595
M24	200	60	191.0	45	9.5	–	36	25	-30	80	1041.0	22590.0598

Application example

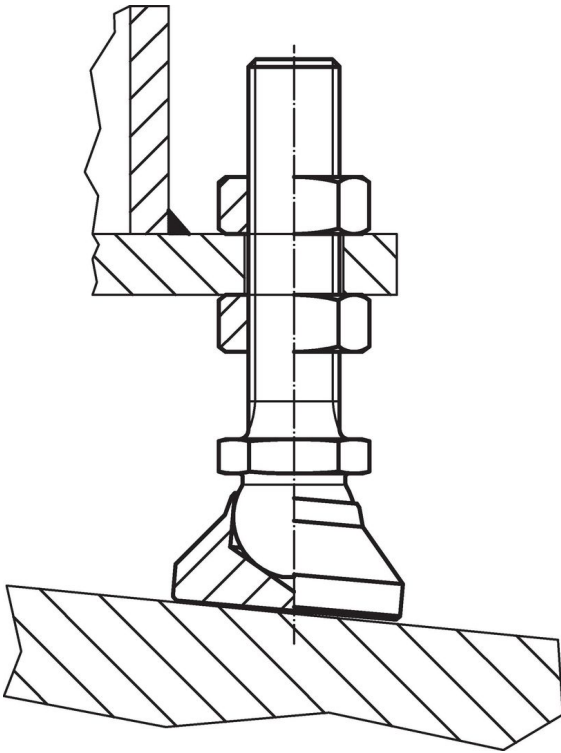

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 27.06.2024.

Does not contain Proposition 65 substances

No Proposition 65 substances included.

<https://www.P65Warnings.ca.gov/>

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.