

Cerniere • elongated on both sides

25165.1075



Descrizione prodotto

The different versions cover many applications that require a low load.

These metal hinges are characterised by their simple design and the different versions:

- without bores
- with bores
- with bores for countersunk screws

The version without bores can be assembled by welding or by inserting a specific drilling pattern.

Materiale



Corpo

- Acciaio, zincato e passivato

Asse

- Acciaio inox 1.4301


Disegno

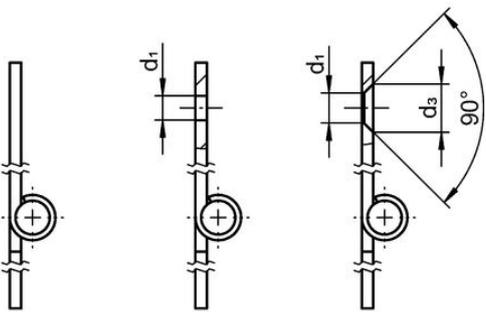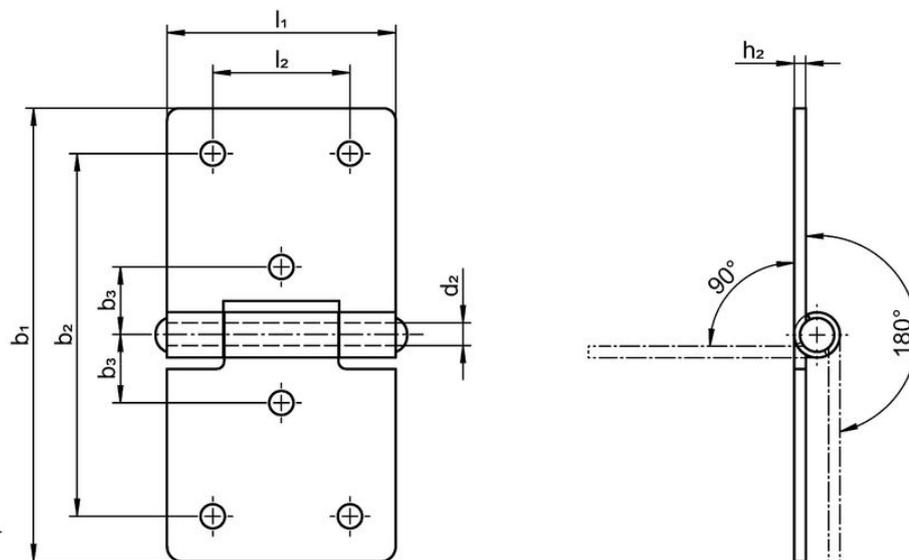

picture 1

picture 2

picture 3

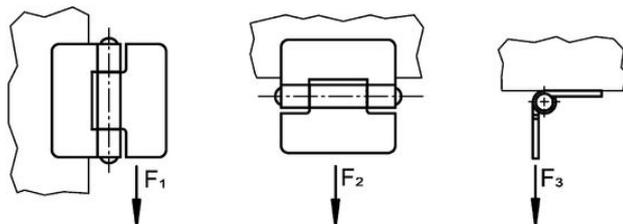

Caratteristiche

| Dimensioni | | | | | | | | | | Forza di ritegno | | |  | Codice |
|-------------------------------------|----------------|----------------|----------------|----------------|----------------|---------------------|----------------|----------------|---------------------|---------------------|---------------------|-----|---|--------|
| b ₁ | l ₁ | b ₂ | b ₃ | d ₁ | d ₂ | h ₁ ~ | h ₂ | l ₂ | F ₁ ~ | F ₂ ~ | F ₃ ~ | [g] | | |
| [mm] | | | | | | | | | | [N] | | | | |
| with bores – Fig. 2, Acciaio | | | | | | | | | | | | | | |
| 80 | 40 | 65 | 12,5 | 4,2 | 4 | 8 | 2 | 25 | 1200 | 1000 | 1000 | 58 | 25165.1075 | |

Conformità

Conforme alla normativa RoHS

Conforme alla Direttiva 2011/65/UE e alla Direttiva 2015/863.

Non contiene sostanze SVHC

Nessuna sostanza SVHC con più dello 0,1% p/p contenuto - elenco SVHC [REACH] aggiornato al 23.01.2024.

Non contiene sostanze della Proposition 65

Nessuna sostanza contemplata nella Proposition 65

<https://www.P65Warnings.ca.gov/>

Privo di minerali di conflitto

Questo prodotto non contiene sostanze designate come "minerali da conflitto" come tantalio, stagno, oro o tungsteno della Repubblica Democratica del Congo o dei paesi limitrofi.